


DOSATRON Proportional Entrainment Pump

- Chemical dosing pump.
- Suitable for pressurised water supplies (0.3 – 6.0 Bar).
- Not suitable for using with gravity-fed water from a tank.
- Very accurate even at low dosing rates.
- Dosing remains accurate during fluctuations of water flow.
- Dosage rate between 0.2% and 2.0%.
- Capable of working at 10 litres to 2,500 Litres per Hour.
- Powered by water pressure – No electrical connections.
- Strong chemical resistant construction.
- Suitable for use with Hypochlorite and Peracetic acid.
- Will work accurately up to Max 40° C.
- Can be used with Coil Udder Washer for a warm disinfectant pre-milking wash system.



SPECIFICATION

Dosage Rate	0.2% - 2.0%
Flow Rate	10 - 2500 Ltr/Hr
Operating Pressure	0.3 - 6 bar (4.3 - 85 psi)
Max Temperature	40°C
Pipe connection size	¾" BSP male
Extremely quiet in operation	
PVDF housing is resistant to dairy chemicals	

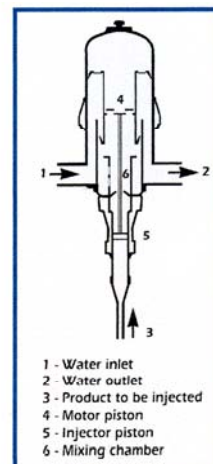

For further information:-

sales@milkingmachines.co.uk or telephone 01983 532667